

# Bungalow Elevators



BONNY Home elevator is the elevator designed to meet vertical mobility needs in public and private buildings.

It is the ideal solution for elderly and impaired mobility persons which can finally move autonomously and free from stairs.

It is modern product, designed and manufactured to meet a wide range of needs, from the garage to the roof, you can move effortlessly up to 4 floors.

Your Perfect Life is  
**Comfortable & Relaxing**


## Landing Operating Panel



Touch Screen with LCD Surface Mounted design with Plexiglass Panel and Zinc Alloy Out Frame



## Car Operating Panel

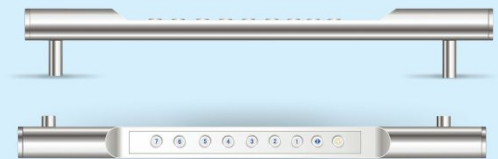

**40% Energy Saving**



Mini Gearless Machine

## MRL Elevator

Dimension for Bungalow Elevator (Machine Room Less)

LOAD		ELEVATOR SHAFT		CAR PLATFORM		CAR INSIDE		ENTERANCE	SPEED MPS	PIT DEPTH	OVER HEAD	CAR INSIDE SQ.MTR
Person	kg	W	D	W	D	W	D					
3	204	1600	1350	910	1000	850	850	700	1.0/1.5	1600	4500 to 5100	0.73
4	272	1600	1400	910	1150	850	1000	700	1.0/1.5			0.85
5	340	1700	1400	960	1150	900	1000	700/800	1.0/1.5			0.90

All dimension are in mm.  
This is general data, it may be changed without notice for more details contact us.  
All hoist way walls should be minimum 230 mm brick or 150 mm R.C.C.

## Single Phase

Gearless Home Elevator

### Main Features and Benefits

- Single Phase Power Supply.
- Compact Overhead Space and Pit Area.
- 40% Energy Compared to Hydraulic Elevator.
- Easy to Install and Maintain.

## MRL Elevator

Dimension For Bungalow Elevators Machine Room Less Elevator

LOAD		ELEVATOR SHAFT		CAR PLATFORM		CAR INSIDE		ENTERANCE	SPEED MPS	PIT DEPTH	OVER HEAD	CAR INSIDE SQ.MTR
Person	kg	W	D	W	D	W	D					
3	204	1600	1350	910	1000	850	850	700	0.30	600	400	0.73
4	272	1600	1400	910	1150	850	1000	700				0.85
5	340	1700	1400	960	1150	900	1000	700/800				0.90

All dimension are in mm.  
This is general data, it may be changed without notice for more details contact us.  
All hoist way walls should be minimum 230 mm brick or 150 mm R.C.C.